



TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED

# 产品规格书

## *Product Specification Sheet*

### TOP-SFP+-10G-ER

RoHS Compliant 10Gb/s SFP+ 1550nm 40km Optical Transceiver



E-MAIL: [lisa@topsfp.com](mailto:lisa@topsfp.com)



威星科技實業有限公司

<http://www.opticalmodulemanufacturers.com>



## **PRODUCT FEATURES**

- Up to 11.3Gbps Data Links
- Up to 40km transmission on SMF
- EML transmitter and PIN receiver
- Metal enclosure for lower EMI
- 2-wire interface with integrated Digital Diagnostic monitoring
- Hot-pluggable SFP+ footprint
- Specifications compliant with SFF-8472
- Compliant with SFP+ MSA with LC connector
- Single 3.3V power supply
- Commercial/Industrial case operating temperature range: 0°C to 70°C /-40°C to 85°C

## **APPLICATIONS**

- 10GBASE-ER/EW & 10G Ethernet
- 10G SONET/SDH, OTU2/2e

## **STANDARD**

- Compliant to SFF-8431
- Compliant to SFF 8472
- RoHS Compliant.



## Product Selection

TOPSTAR's TOP-SFP+-10G-ER serial SFP+ transceiver is designed for use in 10-Gigabit Ethernet links up to 40km over single mode fiber. The module consists of 1550 EML Laser, InGaAs PIN and Preamplifier in a high-integrated optical sub-assembly. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472. The module data link up to 40km in 9/125um single mode fiber.

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	Ts	-40	-	85	°C	
Relative Humidity	RH	5	-	95	%	
Power Supply Voltage	VCC	-0.3	-	4	V	
Signal Input Voltage		Vcc-0.3	-	Vcc+0.3	V	

## Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Top	0	-	70	°C	TOP-SFP+10G-ER
		-40		85		TOP-SFP+10G-ER
Power Supply Voltage	V <sub>CC</sub>	3.14	3.3	3.47	V	
Data Rate	BR		10.312	11.3	Gbp	
Max transmission	TD		40		km	
Coupled fiber	Single mode fiber					9/125um SMF

## Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Average Launched Power	PO	-1		+3	dBm	Note (1)
Extinction Ratio	ER	8.2			dB	



Center Wavelength	$\lambda_c$	1530	1550	1565	nm	
Spectrum Band Width (-20dB)	$\sigma$			1.0	nm	
SMSR		30			dB	
Transmitter OFF Output Power	P <sub>Off</sub>			-30	dBm	
Transmitter and Dispersion Penalty	TDP			2.0	dB	
Output Eye Mask	Compliant with IEEE 802.3ae					
<b>Receiver</b>						
Input Optical Wavelength	$\lambda$	1270		1610	nm	
Receiver Sensitivity	P <sub>sen</sub>			-16.0	dBm	Note (2)
Input Saturation Power (Overload)	P <sub>sat</sub>	0			dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-assert	LOSD			-17	dBm	
LOS Detect Hysteresis	P <sub>hys</sub>	0.5			dB	

**Note:**

1. Launched power (avg.) is power coupled into a single mode fiber with master connector. (Before of Life)
2. Measured with conformance test signal for BER = 10<sup>-12</sup>.@10.3125Gbps, PRBS=2<sup>31</sup>-1,NRZ; Optical source with worst ER, Wavelength between 1530nm and 1565nm; back to back



## Electrical Characteristics


Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Supply Voltage	V <sub>CC</sub>	3.14	3.3	3.46	V	
Supply Current (Note 1)	I <sub>CC</sub>			370	mA	TOP-SFP+10G-ER
				430		TOP-SFP+10G-ERA
				400		TOP-SFP+10G-ER
				460		TOP-SFP+10G-ERA
<b>Transmitter</b>						
Input differential impedance	R <sub>in</sub>		100		Ω	2
Single ended data input	V <sub>in-pp</sub>	180		700	mV	
Transmit Disable Voltage	V <sub>Dis</sub>	2.0		V <sub>CC</sub>	V	3
Transmit Enable Voltage	V <sub>EN</sub>	V <sub>EE</sub>		V <sub>EE</sub> +0.8	V	
Transmit Disable Assert				10	us	
<b>Receiver</b>						
Differential data output	V <sub>out-pp</sub>	400		800	mV	4
Data output rise time	t <sub>r</sub>	28			ps	5
Data output fall time	t <sub>f</sub>	28			ps	5
LOS output high level	V <sub>LOS-H</sub>	2.0		V <sub>CCHOST</sub>	V	6
LOS output low level	V <sub>LOS-L</sub>	V <sub>EE</sub>		V <sub>EE</sub> +0.8	V	6
Power Supply Rejection	PSR	100			mVpp	7

### Notes:

1. Measured with receive Pin=Psen, V<sub>CC</sub>=3.3V, operation temperature range, without air flow
2. Connected directly to TX data input pins. AC coupled Or open circuit.
3. Into 100 ohms differential termination. 5. 20 – 80 %.
6. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
7. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.



## Pin Description

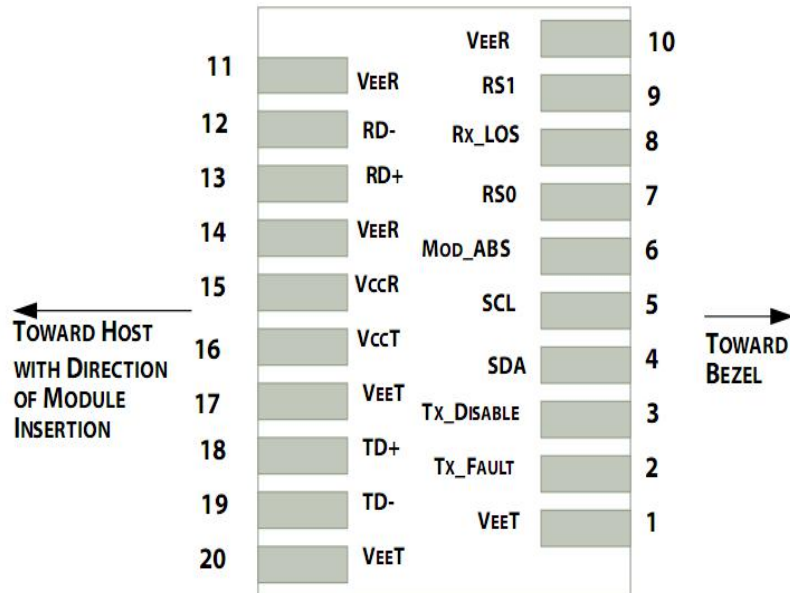

**Pin out of Connector Block on Host Board**

Pin	Symbol	Name/Descriptio	NOTE
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	T <sub>FAULT</sub>	Transmitter Fault.	2
3	T <sub>DIS</sub>	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	no connection	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	5
9	RS1	Internally connect to circuit ground	
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	



14	V <sub>EEER</sub>	Receiver Ground (Common with Transmitter Ground)	1
15	V <sub>CCR</sub>	Receiver Power Supply	
16	V <sub>CCT</sub>	Transmitter Power Supply	
17	V <sub>EET</sub>	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V <sub>EET</sub>	Transmitter Ground (Common with Receiver Ground)	1

**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an LVTTTL output. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power or the laser temperature exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. Should be pulled up with 4.7kΩ- 10kΩ on host board to a typical 3.3V voltage. MOD\_ABS pulls low to indicate module is plugged in.
5. LOS is open collector output. It should be pulled up with 4.7kΩ – 10kΩ on host board to a typical 3.3V voltage. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## Digital Diagnostic Functions

TOPSTAR’s TOP-SFP+-10G-ER serial transceivers support the 2-wire serial communication protocol as defined in the SFP+MSA. The standard SFP serial ID provides access to identification information that describes the transceiver’s capabilities, standard interfaces, manufacturer, and other information.


Additionally, TOPSTAR SFP+ transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in EEPROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h).The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.




### Recommended Interface Circuit

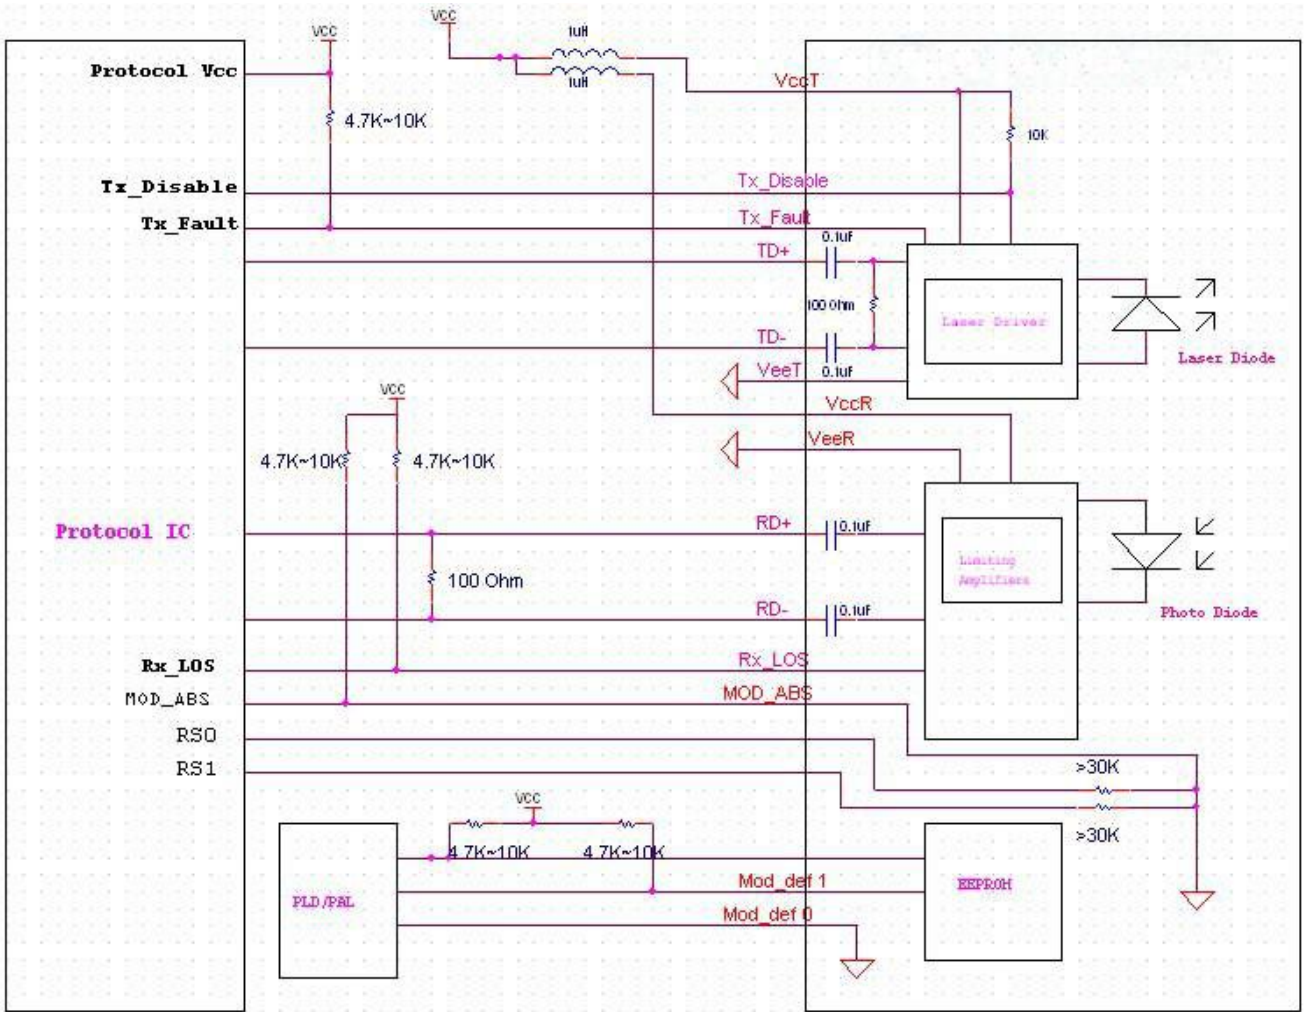





### Outline Dimensions

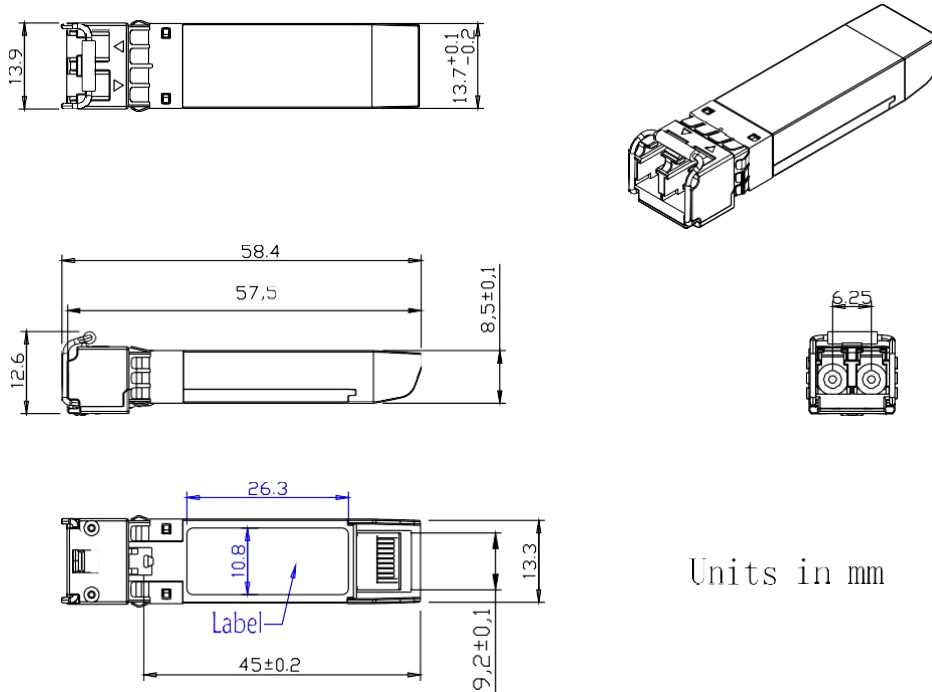

### Ordering Information

Part Number	Description
TOP-SFP-10G-SR	SFP+ PLUS,10.3125Gbps, 850nm, 300M, 0~70°C, with DDM
TOP-SFP-10G-LR	SFP+ PLUS,10.3125Gbps,1310nm,10KM,0~70°C, with DDM
TOP-SFP-10G-LR SDH	SFP+ PLUS,10.3125Gbps,1310nm,10KM,for SDH,0~70°C, with DDM
TOP-SFP-10G-ER	SFP+ PLUS,10.3125Gbps,1550nm,40KM,0~70°C, with DDM
TOP-SFP-10G-ZR	SFP+ PLUS,10.3125Gbps,1550nm,80KM,0~70°C, with DDM



**TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED**

## **Topstar Technology Industrial Co., Ltd**

**Add: F5, Rongcheng Building, 28 Yayuan Road Wuhe Community, BanTian Street, Shenzhen, China**

**Tel: +86 755 8255 2969 Email:lisa@topsfp.com**

**Skype: lisalin6565      Whatsapp: +86 13798265065**

**Wechat: 251081707**

**Facebook and Linked in: Topstar Technology Industrial Co., Ltd**



威星科技實業有限公司

<http://www.opticalmodulemanufacturers.com>